

Rec'd PCT/PTO 09 MAR 2005

PCT/AU03/01108




*[Handwritten signature]*

REC'D 09 SEP 2003

WIPO PCT

Patent Office  
Canberra

I, SMILJA DRAGOSAVLJEVIC, TEAM LEADER EXAMINATION  
SUPPORT AND SALES hereby certify that annexed is a true copy of the  
Provisional specification in connection with Application No. 2002951506 for a  
patent by CAROMA INDUSTRIES LIMITED as filed on 19 September 2002.

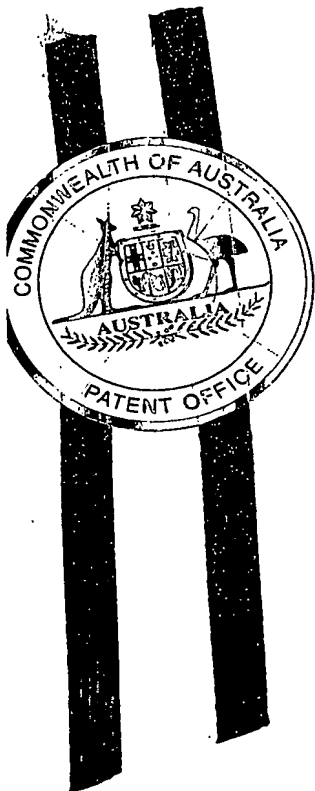

WITNESS my hand this  
Fourth day of September 2003

*S. Dragosavljevic*

SMILJA DRAGOSAVLJEVIC  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**

ORIGINAL

AUSTRALIA

Patents Act 1990

**PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:**

A Lifting Lever for A Cistern Flush Valve

---

**Name and Address of Applicant:**

Caroma Industries Limited, an Australian company, ACN 000 189 499, of 10  
Market Street, Brisbane, Queensland, 4000, Australia

**Names of Inventors:**

Colin William Wooldridge and Sam Robertson England

This invention is best described in the following statement:

## A LIFTING LEVER FOR A CISTERN FLUSH VALVE

### Field of the Invention

5       The present invention relates to a lifting lever for a cistern flush valve. A cistern is known as a flush tank in the United States of America.

### Background of the Invention

10       Cistern flush valves are usually actuated by depressing a button in the lid of the cistern. A lever arrangement within the cistern then converts the downward movement of the button into an upward movement of the cistern flush valve.

15       It is known to introduce mechanical advantage between the movement of the actuation button and the responsive movement of the flush valve. If the mechanical advantage is too low, then excessive force may be needed on the button in order to initially lift the valve and break its seal. If the mechanical advantage is too high, then an excessive amount of button travel may be required to sufficiently lift the flush valve.

20       It is an object of the present invention to provide a lifting lever that combines an acceptable button force with an acceptable flush valve travel.

### Summary of the Invention

25       A lifting lever for a cistern flush valve, the lever including:  
a first end adapted for operative engagement with the cistern flush valve;  
a second end adapted for operative engagement with a flush actuation button; and  
a pivot mounting between the first and second end,  
wherein the second end has first and second engagement regions which are  
30       respectively closer and farther to the pivot mounting such that initial movement of the button causes it to engage the second engagement region and pivot the lever through a first predetermined range of movement whereafter further movement of the button in the same direction causes it to engage the first engagement region and further pivot the lever.

**BEST AVAILABLE COPY**

The first and second engagement regions are preferably in the form of first and second external corners on the lever second end. The first and second corners preferably have a straight joining surface therebetween.

5 The pivot mounting is preferably adapted to mount the lever to a bridge forming part of, or connected to, a cistern.

The lever is preferably formed from a first and a second part. The first and second parts preferably include the first and second ends respectively. The first and second parts  
10 are preferably fixed together adjacent the pivot mounting.

The button is preferably constrained to travel along a straight path that is parallel to the tangent of the path of motion of the first and second engagement regions.

#### 15 Brief Description of the Drawings

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

20 Fig. 1 is a schematic side view of an embodiment of a lifting lever according to the invention, before flush actuation;

Fig. 2 is a schematic side view of the lever shown in Fig. 1 during initial flush actuation; and

25 Fig. 3 is a schematic side view of the lever shown in Fig. 1 with continued actuation from that shown in Fig. 2.

#### Detailed Description of the Preferred Embodiment

30 Referring firstly to Fig. 1, there is shown an embodiment of a lifting lever 10 for a cistern flush valve (not shown). The lever is comprised of a first part 12 having a first end 14 and a second part 16 having a second end 18. The first and second parts 14, 16 are joined together at 20 in such a manner so as to not pivot relative to each other. Fig. 1 also

shows a bridge 22 which can form part of, or be attached to, a cistern (not shown). Also shown is an actuation button 24 which has an actuation surface 26, which is accessible through the lid (not shown) of the cistern, and a driving surface 27. The lever 10 is pivotally mounted to the bridge 22 so as to pivot about axis 28. The button 24 is constrained to move along a substantially straight line in an up and down direction.

The first end 14 of the lever 10 has an opening 30 which is adapted for operative engagement with a cistern flush valve (not shown). The second end 18 of the lever 10 has first and second engagement regions, in the form of first and second corners 32 and 34. The radial distance from the axis 28 to the opening 30 is denoted  $r_1$ . The radial distance from the axis 28 to the first corner 32 is denoted  $r_2$ . The radial distance from the axis 28 to the second corner 34 is denoted  $r_3$ . In the embodiment shown, the ratios  $r_1:r_2$  and  $r_1:r_3$  are approximately 2.0:1 and 1.2:1 respectively.

The operation of the lever 10 will now be described. Fig. 1 shows the lever 10 before actuation of the flush valve in which the first end 14 is at its lowest point and the second end 18 is at its highest point. In this position, the second corner 34 of lever second end 18 abuts and engages the driving surface 27 of the button 24. When the button 24 is depressed in the direction of arrow 36 from the position shown in Fig. 1 to the position shown in Fig. 2, the second end 18 is driven down and the first end 14 is driven up to actuate the flush valve by initially breaking the seal of the flush valve. The mechanical advantage provided by engagement of the second corner 34 with the driving surface 27 of button 24 is approximately 1.2:1.

When the button is at the position shown in Fig. 2, the driving surface 27 is in abutment and engagement with the first corner 32 of the lever second end 18. Continued movement of the button 24 in the direction of arrow 36 from the position shown in Fig. 2 to Fig. 3 continues to drive the second end 18 downwards and the first end of the lever 14 upwards. However, during this movement, the mechanical advantage from the movement of the button 24 to the movement of the valve is greater at 2.0:1.

In the preferred embodiment, the corners 32 and 34 are arranged such that the lower mechanical advantage is experienced during the first few millimetres of valve opening

**BEST AVAILABLE COPY**

and the higher mechanical advantage is then experienced until a total valve displacement of about 20mm has occurred.

Accordingly, the lifting lever 10 provides a higher amount of mechanical advantage  
5 during initial movement of the button 24 and thus generates a relatively higher lifting  
force during this initial movement. This is beneficial whilst opening an outlet valve as  
the forces required are initially quite high in order to lift the valve off its seat and break its  
seal. However, once the seal has been broken, the forces required to continue to lift the  
valve decrease considerably and, during this movement, the mechanical advantage (ie. the  
10 lever ratio) provided by the lever decreases to 2:1 to advantageously achieve a relatively  
high lift of the cistern valve compared to the travel of the button.

The lifting lever 10 therefore allows the valve to be actuated without requiring an  
excessive actuation force whilst still providing a sufficient amount of lift.

15

Although the invention has been described with reference to a preferred  
embodiment, it will be appreciated by those skilled in the art that the invention may be  
embodied in many other forms. For example, although the preferred embodiment was  
described in relation to push button style cistern actuation, the invention is also suitable  
20 for use with lever style cistern actuation.

**Dated 19 September, 2002**

**Caroma Industries Limited**

25

**Patent Attorneys for the Applicant/Nominated Person**  
**SPRUSON & FERGUSON**

**BEST AVAILABLE COPY**

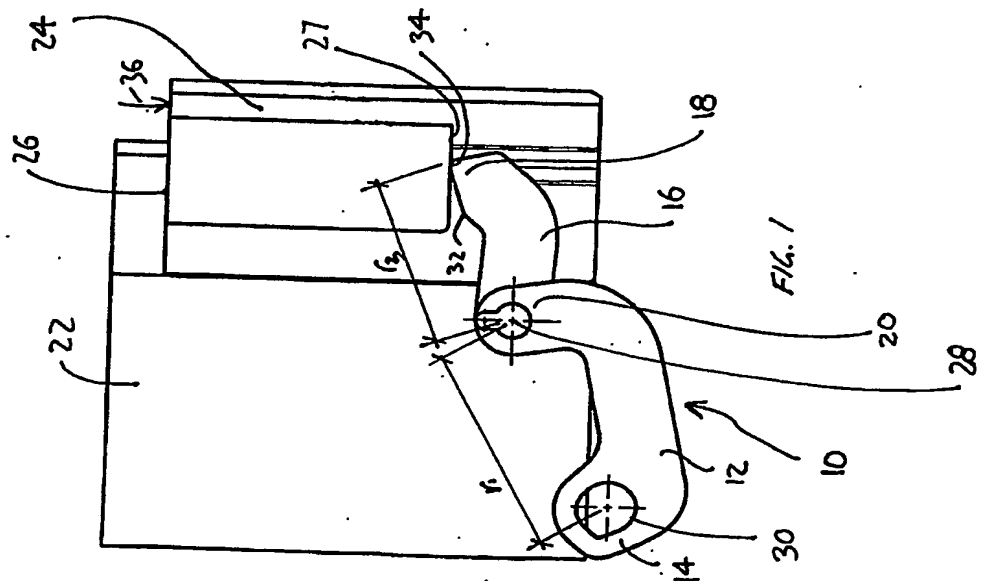


FIG. 1

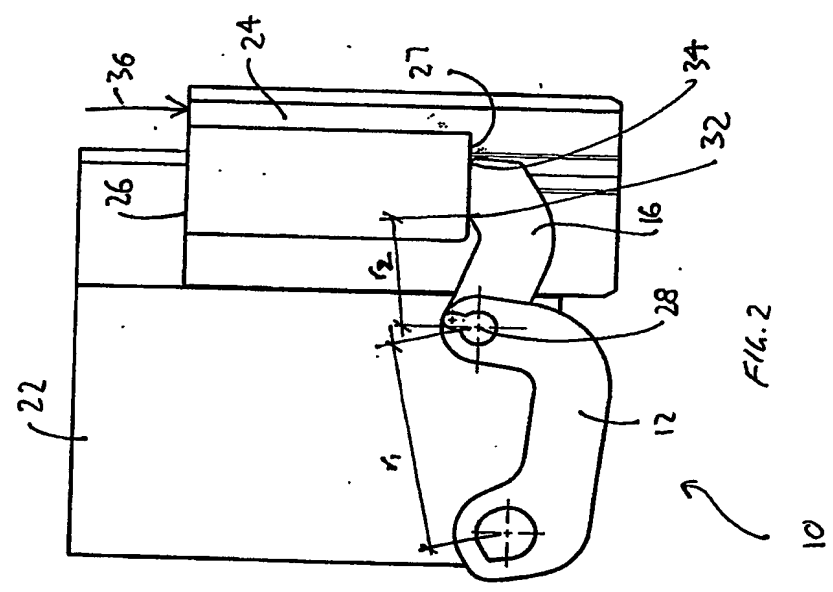


FIG. 2

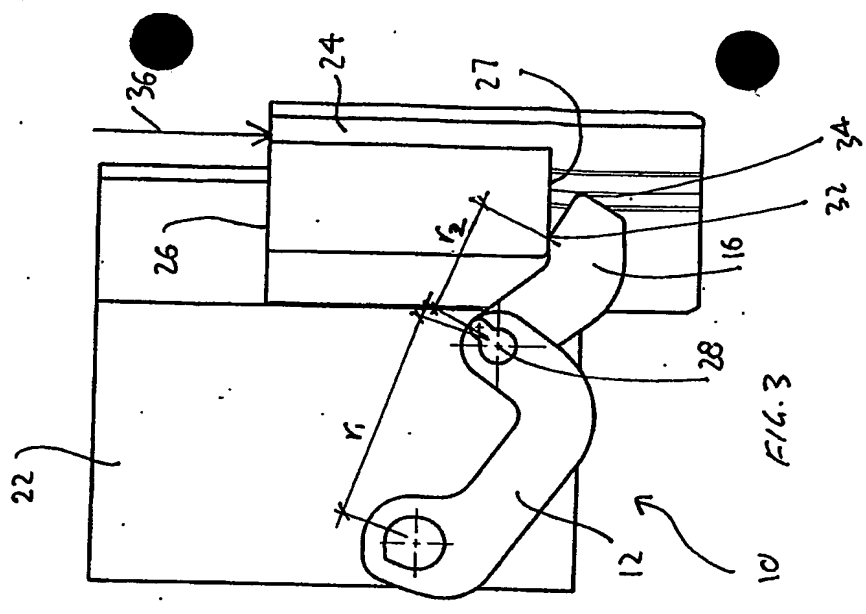


FIG. 3